


SALIENT FEATURES

- Source 4 -20mA Output in Manual mode
- Sink 4 - 20 mA output in Auto mode
- Auto/Manual selection through switch on front fascia
- Compact size & easy maintenance .

DESCRIPTION

Electronet's Series of AM 01 Digital Auto/manual station is specially designed for various industrial applications. In manual mode the output is adjusted through push buttons available on front fascia & in auto mode the input is transferred with same ratio. In both Auto & Manual Mode the percentage of output is viewed on Digital Display.

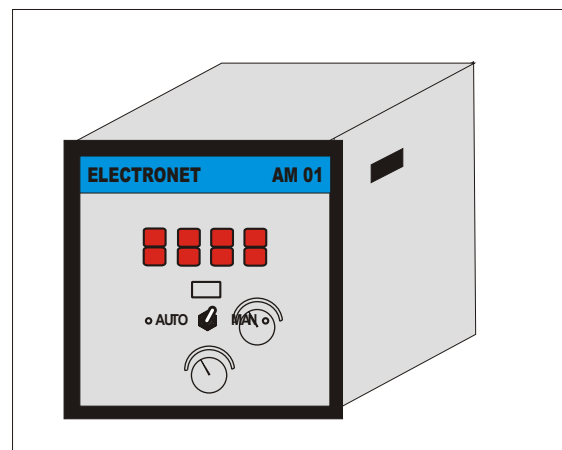

TECHNICAL SPECIFICATIONS

Input	: 4 - 20mA DC in Auto mode Only
Display	: 3 ½ Digit ,0.5" ,7 Segment RED LED
Power supply	: 1) 230/110/24 V AC,50Hz,+/- 10% 2) 24 VDC
Power Consumption	: 6 Watts Max
Output	: 4 - 20m DC
Accuracy	: +/-0.01% of F.S.
Temperature Drift	: Less than 0.01% of F.S. Per °C Change
Enclosure	: Sheet steel Powder Coated
Dimensions	: 1)96(W)X96(H)X160(D) 2)72(W)X114(H)X160(D)
Mounting	: Flush of the panel
Weight	: 1 Kg Approx
Operating Temperature	: 0 - 55°C
Operating Humidity	: 10 - 90% RH

CODIFICATION FOR AM 01

CODE : POWER SUPPLY

01 : 230 VAC

02 : 110 VAC

03 : 24 VAC

CODE : SIZE

01 : 96 MM x 96MM


02 : 72MM x 144 MM

AM 01 01

01


SAMPLE MODEL NUMBER

MOUNTING DETAILS

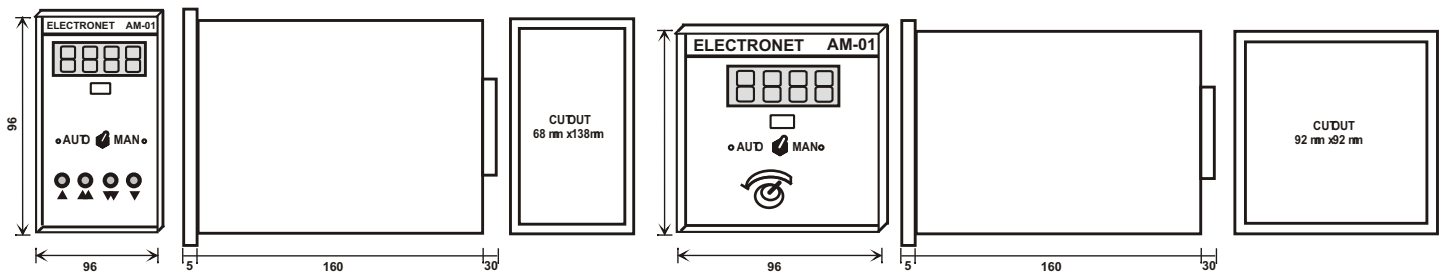

Due to our continuous product revisions, Design, Specifications and Model Numbers are subject to change without notice.

MANUFACTURED & MARKETED BY

 **ELECTRONET EQUIPMENTS PVT. LTD**
PROCESS CONTROL INSTRUMENTS & AUTOMATION

Plot No 85 & 86, Tiny Industrial Estate, Kondhwa Bk.

Pune - 411 048, Maharashtra, India

Telefax: +91 20 2693 4122 / 1476

E-mail: elecnet@vsnl.com / eeplsales@dataone.in

Web: www.electronetequipments.com

REP BY: