


## REFLEX LEVEL INDICATOR ( RSA 1350 )

It is designed for most critical requirements of liquid level in vessels under high pressure & temperature condition in petrochemicals, fertilizer and pharmaceuticals & chemical industries involving inflammable toxic liquid, high temp Liquids.

### FEATURES:-

The glass has precision moulded prismatic grooves cut on its inner side coming in contact with the medium. These level gauges have liquid chamber made out of single piece bar stock. Liquid level in the slotted chamber is seen through heavy duty toughened glasses. These glasses are clamped firmly on the chamber using carbon steel cover plates and using with CS "U" Bolts & Nuts.

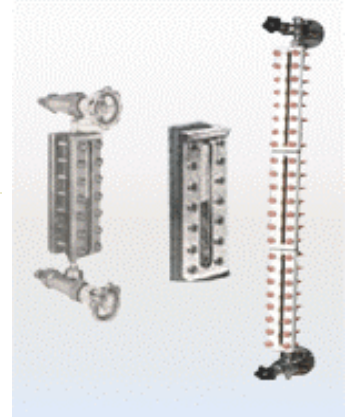

### Material of construction available

Liquid Chamber	:	Machined out of single piece bar solid bar stock made of M.S. / S.S. / P.P.
Cover Plates	:	M.S. / S.S.304 / S.S.-316.
"U" Bolts & Nuts	:	C.S. / S.S.304 / S.S.-316.
Cushion	:	CAF.
Packing	:	Imported / Teflon
Glass	:	Indian toughened glass / Imported klinger
Test pressure	:	50 kg / cm <sup>2</sup> Max.
Temp.	:	350° c.
Isolation valve	:	Isolation can be provided with built in auto shut off or simple isolation valve without shut off.
Mounting	:	Flanged or screwed end.
Available Length	:	In single piece 3.5 meter



# 649 ,12<sup>th</sup> main, 28<sup>th</sup> cross ,2<sup>nd</sup> block  
RAJAJINAGAR , BANGALORE- 560010  
TEL.080- 23131456 , FAX080- 23131237  
E-mail : rohini11@dataone.in